

BD-8016

# **(8 + 8) CH series stage light console**

**(8+8)CH LIGHTING CONTROL**

# **Instruction**

# **Book**

**The professional light controls the equipment**

## 一、 overviews

16 road (8 + 8) CH integration series dimmer, Is the specialized production and small stage for flow、 Hall, ballroom, studio, Audio-visual teaching, With its small portable, economical and practical, favored by the vast number of users.

## 二、 Main technical parameters:

Input voltage: 380V, Three-phase five line

Each output power: 3KW

Output voltage:  $217 \pm 1V$

program : 8

Program speed range: 0.2- 5HZ

## 三、 Operating instructions:

Before the operation should check whether the connection cables;

Check whether the operating platform to putter potentiometer;

Check whether the switch in closed position:

After, can supply the power supply, open the switch;

《Buttons each function》 DECA Program -1 INCA Programs + 1

DYNAMIC Enter since plus program Programs 0-8 automatic feeding To back out again

SLOWER Program is running low speed “Long press can”

QUICKEN Program running speed “Long press can”

## 四、 Panel function and use:

A、 Program control parts: Select button STEP manually by program.


Program speed knob (SPEED) component。 Program selector switch optional 8 groups procedures: 0 toward go lights, 1round light; 2 scans and flashing mix; 3 flashing; 4trade off 5string 6reverse 7accumulate。 Each group of three kinds of control procedures, Can choose to choose program 8/4switch; L-4 in the left program; R-On the right 4road program; L-RWhen the lights are for eight ways, Programs that can change speed knob speed is adjusted to the 0.2- 5HZ, Twist program can change speed knob speed walking lamp. Join procedure switch(PROGRAM) Have 2 switch 1-8 respectively to 16 road / 9 road. 6with join procedure by corresponding join program-controlled switch effect of two groups of corresponding circuits.

B、 Dimmer: 8 dimmer putter and a total control rod, 1-8 control circuit output dimming. Dimmer part eight point control buttons and a total point control buttons. Some control maximum output full range(+10)

C、 Sonic part: By audio sensitivity knob(SOUND) And audio input jacksJoin televox switch has 2 switch 1-8 respectively. 9-16 road. with join televox switch audio signal is corresponding to join the corresponding 2 groups in the loop.

D. Switch part: By a row (8) switch, 9-16 respectively controlling the lamp on or off, The most suitable for motor or inductive lamplight (program、 Results lamp)

五、 Light wiring diagram (See below) :

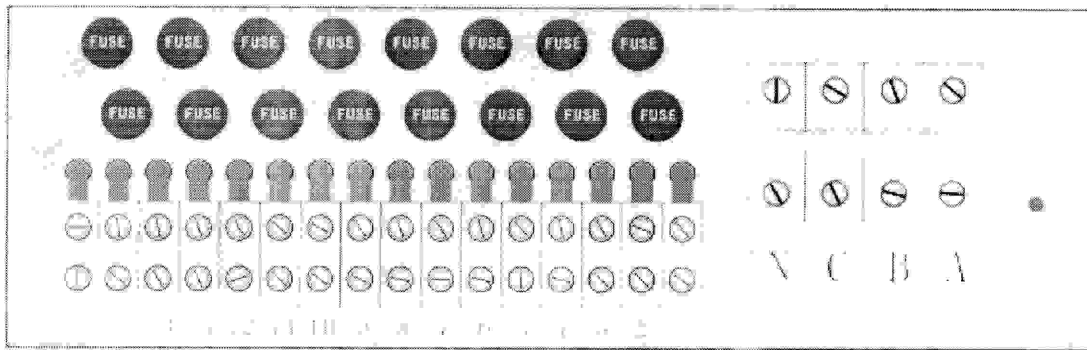

**warning:**

- \*Equipment installation process between the ban**
- \*In strict accordance with the safety standard electricity wiring**
- \*Heavy input; Output terminals to solid solid surface to good**
- \*Pay special attention to the safety equipment connect well grounded**